




Requirements: Microsoft Windows VISTA and user-id HAN-Account a.k.a. HANDS account.

Get 'securew2 v3.2.0 for Windows Vista' from <http://www.han.nl/insite/ict> Choose 'Producten en Diensten' → 'Handleidingen & instructies' → 'Wireless networking / printing in Arnhem and Nijmegen'. Download or open **SecureW2_TTLS_VISTA_HANv.01.zip** Follow next instructions steps. After installation system has to reboot!

1. Double click **SecureW2_TTLS_320_VISTA_HANv0.1.zip**. Unzip (copy-paste) all files to a sub-directory.
2. Double click **SecureW2_TTLS_320_VISTA.exe**
3. Click on Run

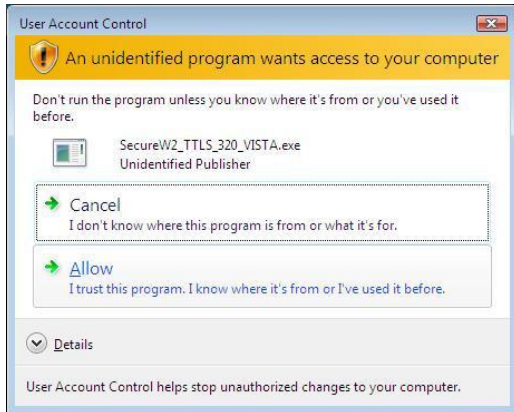

4. User Account Control popup with warning. Select 'Allow'.
5. Select your preferred language. 'English', 'Nederlands' or 'Slovenski jezik'. Then click OK.
6. Welcome message Information. Click "Next".
7. License Agreement. Click on "I Agree".
8. Components to install. Click on "Install".

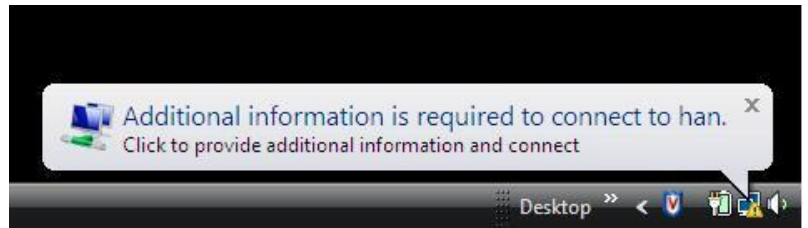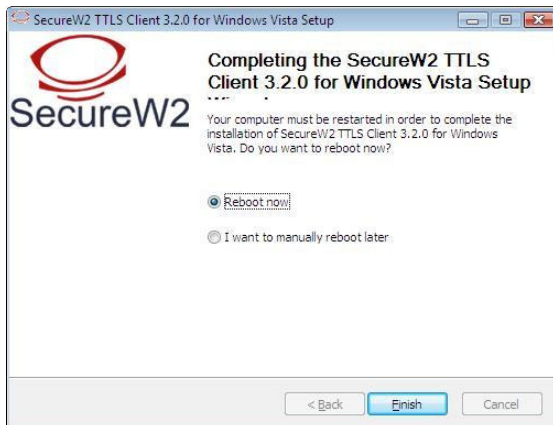

9. Click "Finish". System reboots and SecureW2 is installed.

10. After reboot you see in lower-right corner a popup (wait a few seconds). Click on this popup and a login window appears.



11. SecureW2 login window: fill in your HAN-account (a.k.a. HANDS account) and password

12. Don't forget to check the 'Save user credentials' option.

12

Problem solving:




1. If this popup does occur then right-click the wireless network icon with the red cross (taskbar lower-right corner).

1.


- 2. 'Connect to a network'.
- 3. Select 'han' and choose "Connect".
- 4. repeat (as described) steps 10., 11. and 12.

Check your han-account and password and configuration. Perform next check.

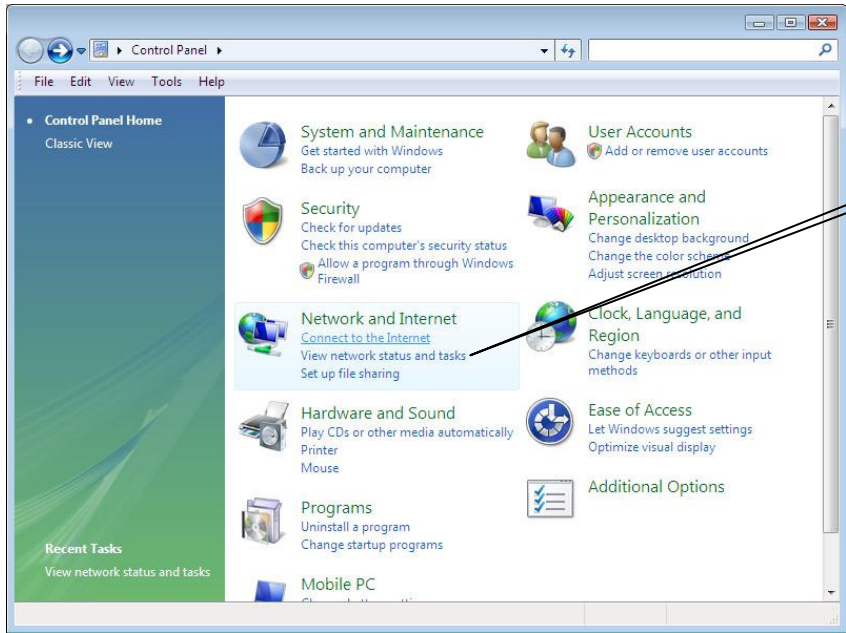


1.

1.Go from Start → Control Panel (control Panel Home) 'View network status and tasks'.

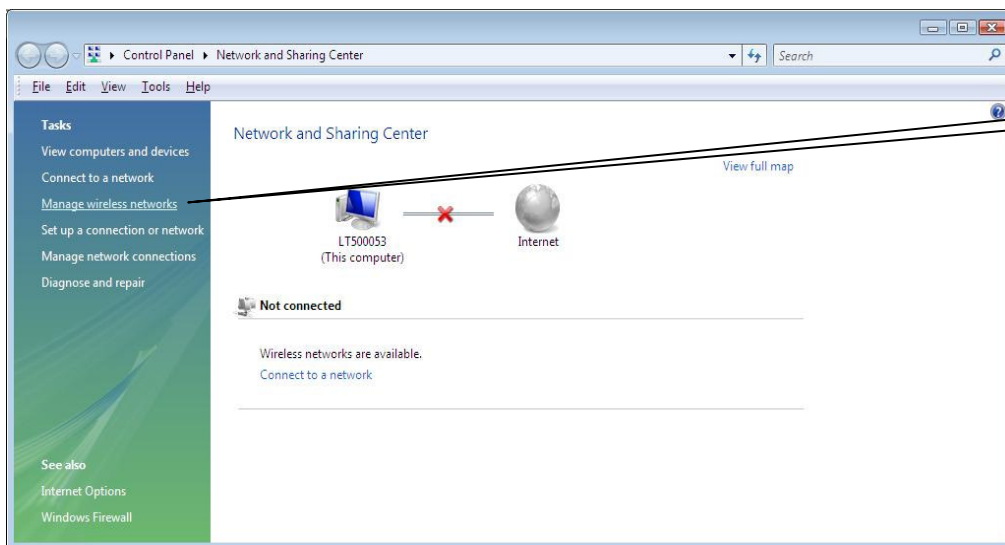


2.


2. Select 'Manage wireless networks'.

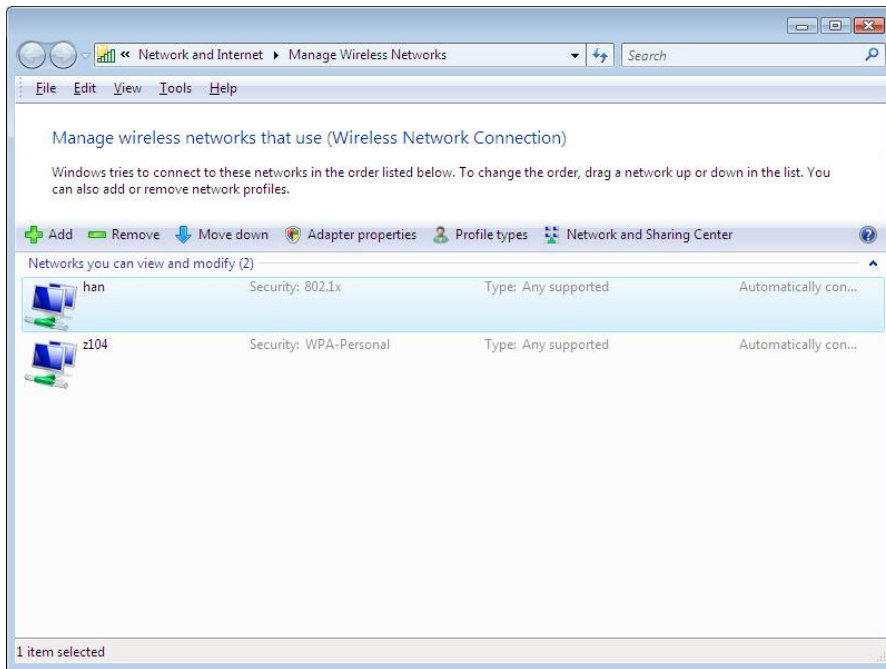


3. select 'han' -> right-click 'han'. → select "Properties".

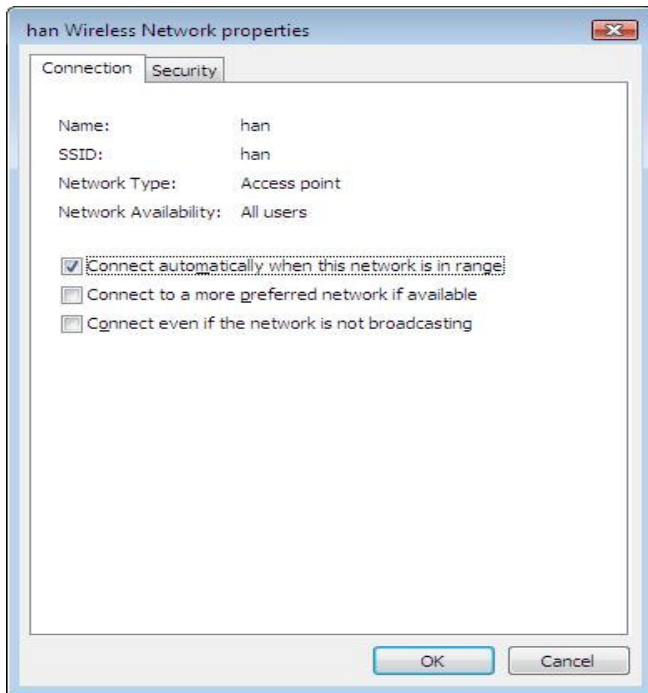

4. Check tick 'Connect automatically...' un-tick others → choose -tab- 'Security'.

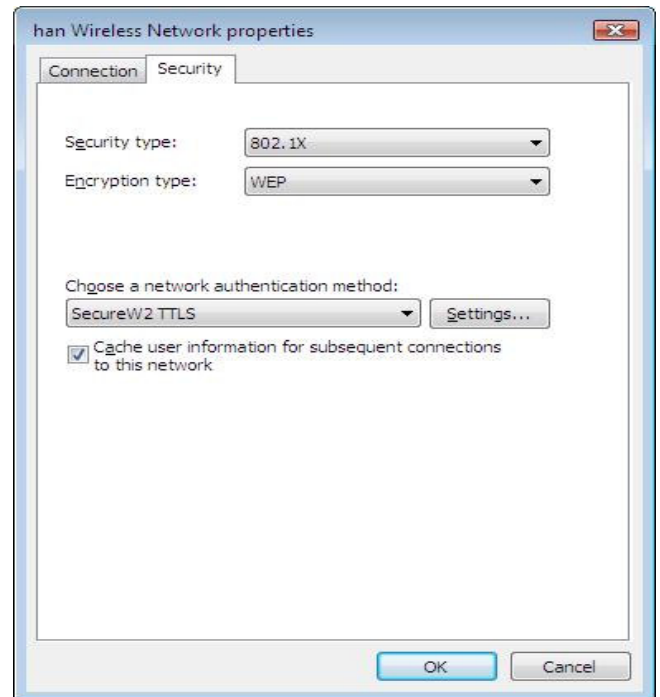


5. Check 'Security type:' 802.1X and 'Encryption:' WEP → Select 'Settings...'.

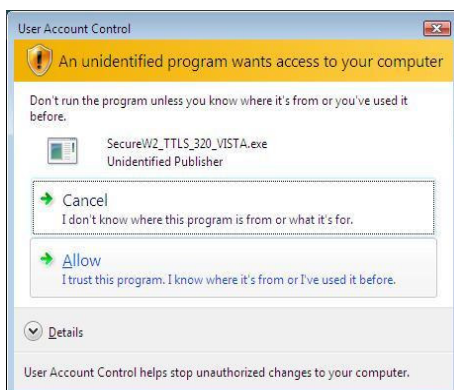

6. User Account Control popup with warning. Choose 'Allow'

7. Select Profile 'Han Wireless Connection' → 'Configure'

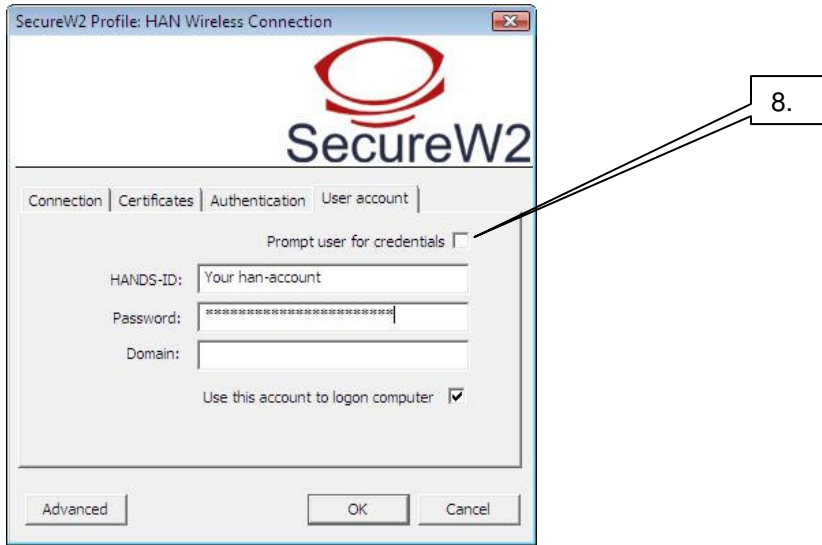

7. -tab- "User account → Fill in your han-account and password.

8. Un-tick 'Prompt user for credentials'

9. Close all of secureW2 configuration: Click OK→OK→OK.

Optional Information:

If you change your password be sure to change it in secureW2 also! Start with first step Problem solving.

After a few seconds the wireless connection will be established. If not then check your password or try the procedure once again. If all fails see your local helpdesk.

Uninstall additional software that came with your wireless network card. Only install the wireless network drivers.

Some wireless network-cards have a power saving feature. This may cause wireless connection problems. To prevent this you may want to check and modify this:

Control Panel (Home) → Mobile PC → Power Options → Change battery settings

→ If the powerplan is 'Balanced' or 'High performance' then you have nothing to do.

→ If the powerplan is 'Power saver' is chosen then select 'Change plan settings' →

Select 'Change advanced power settings' → select 'Wireless Adapter Settings' → Select

→ On battery: 'Maximum Performance'

→ Plugged in: 'Maximum Performance'

